



Technical Features



RAL 9016
standard



Other colors
on request



Range
Up to 4,2m



Heating types
A : unheated



Casing
Galvanised Steel



Airflow / Length
1850 - 6650 m3/h
1 m to 2,5 m



Heating capacity
-



Grille type
**Micro-perforated
with prefilter function**



Fans
**Centrifugal
5-speed**



Control
**Plug&Play manual regulator
+ IR remote control**



Outlet lamellas
**Aluminium, airfoil type
Adjustable 0-15° each side**

RECESSED COMPACT air curtain is specially designed for non-heating applications. This recessed low profile model has a diffuser grille with an integral view, and a self-supporting frame for installation in false ceilings. Its design is characterized by providing a full view of the inlet and outlet slatted grille, which is maintenance-free and is completely integrated into a single frame colour RAL 9016 Other colours are available on request.

This air curtain model works with double-inlet centrifugal fans driven by an external rotor motor with low noise level. EC models assembled with very low consumption efficiency fans.

Includes Plug&Play control with 7 m RJ45 cable, infrared remote control and magnetic door contact.

CSA certified.

❄️ UNHEATED 208V-1ph~60Hz

Model	Airflow m3/h	Ventilation power 208V-1ph~60Hz kW	Ventilation current 208V-1ph~60Hz A	Noise level (5 m) dB(A)	Weight kg
CR M 1000 A	1850	0,221	1,07	54	33
CR M 1500 A	2775	0,332	1,61	55	50
CR M 2000 A	3700	0,442	2,14	56	61
CR M 2500 A	4625	0,553	2,68	57	68
CR G 1000 A	2325	0,332	1,61	56	37
CR G 1500 A	3100	0,442	2,14	57	55
CR G 2000 A	4650	0,663	3,21	58	71
CR G 2500 A	5425	0,774	3,75	59	78
CR ECG 1000 A	2700	0,319	2,79	60	37
CR ECG 1500 A	3600	0,425	3,72	61	56
CR ECG 2000 A	5400	0,638	5,58	62	71
CR ECG 2500 A	6300	0,744	6,51	63	78



✿ UNHEATED 240V-1ph~60Hz




Model	Airflow	Ventilation power 208V-1ph~60Hz	Ventilation current 208V-1ph~60Hz	Noise level (5 m)	Weight
	m ³ /h	kW	A	dB(A)	kg
CR M 1000 A	2000	0,263	1,10	55	33
CR M 1500 A	3000	0,395	1,65	56	50
CR M 2000 A	4000	0,526	2,20	57	61
CR M 2500 A	5000	0,658	2,75	58	68
CR G 1000 A	2475	0,395	1,65	57	37
CR G 1500 A	3300	0,526	2,20	58	55
CR G 2000 A	4950	0,789	3,30	59	71
CR G 2500 A	5775	0,921	3,85	60	78
CR ECG 1000 A	2850	0,381	2,94	61	37
CR ECG 1500 A	3800	0,508	3,92	62	56
CR ECG 2000 A	5700	0,762	5,88	63	71
CR ECG 2500 A	6650	0,889	6,86	64	78



Selection program



Dimensions

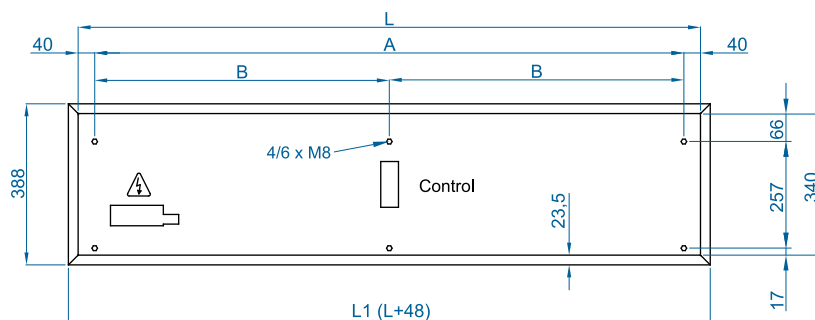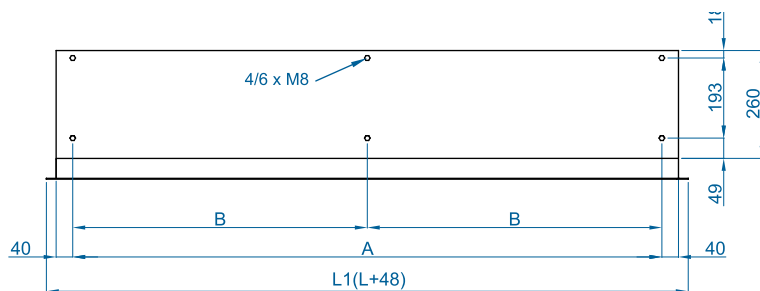

	L	L1	A	B
RC 1000	1000	1048	920	-
RC 1500	1500	1548	1420	710
RC 2000	2000	2048	1920	960
RC 2500	2500	2548	2420	1210

CAD drawings, installation manuals
and other documentation



Optional accessories

Supports and installation



Wall rail support
SPWR



Silentblock supports
SPANG-SIL / SLB



Suspension cables
SPCT

Control



IR Control
✓ Included



Basic Control CA-5AW-IR
✓ Included



Hand-Auto
CH-5HW-NE



Interface kit
IN-NE-II



RJ45 Cable
✓ Included

Sensors



Mechanical door contact
MEC-DC



Magnetic
door contact MAG-DC
✓ Included