




## Characteristics

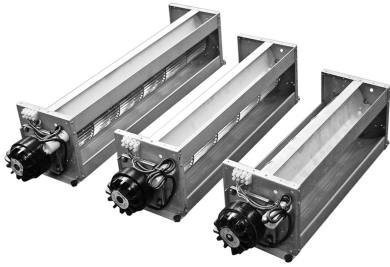

- External rotor motor 100% regulable protected through thermal contact
- Standard ball bearings
- Low noise level
- Intermediate dimensions optional
- Several options: FCS execution outlet air 45°, FCL execution outlet air 90°
- Some models require a minimum quantity purchasing order

## Specifications

Model	Tension (V (50 Hz))	Current fans (A)	Power (W)	Speed (rpm)	Air Flow (m³/h)	Maximum Pressure (Pa)
FCL 100/1030/15U	1x230V	0,6	125	1250	1670	42
FCL 100/1230/15U	1x230V	0,6	125	1250	1750	42
FCL 100/400/12U	1x230V	0,4	67	1250	700	42
FCL 100/500/12U	1x230V	0,4	67	1250	850	43
FCL 100/600/14U	1x230V	0,55	115	1250	1000	45
FCL 100/800/14U	1x230V	0,55	115	1250	1250	40
FCL 133/1030/M80	1x230V	1,1	190	1250	1605	87
FCL 133/1230/M80	1x230V	1,1	190	1250	1790	83
FCL 133/400/15U	1x230V	0,6	125	1250	1255	102
FCL 133/500/15U	1x230V	0,6	125	1250	1330	100
FCL 133/600/15U	1x230V	0,6	125	1250	1410	96
FCL 133/830/15U	1x230V	0,6	125	1250	1555	90
FCL 80/1030/14U	1x230V	0,55	115	1250	930	27
FCL 80/400/12U	1x230V	0,4	67	1250	504	27
FCL 80/500/12U	1x230V	0,4	67	1250	580	27
FCL 80/600/12U	1x230V	0,4	67	1250	660	27
FCL 80/830/14U	1x230V	0,55	115	1250	780	27